

# INSTALLATION INSTRUCTIONS


5056 / 5056-2

**2010 Dodge Ram P/U 2500/3500 2/4WD**

**NOTE: (tow hooks will be re-attached)**

## PARTS LIST:

Qty	Description	Qty	Description
1	Grill Guard Bar	8	10mm Nut
1	Driver/Left Mounting Bracket	6	12mm x 30mm Hex Bolt
1	Passenger/Right Mounting Bracket	12	12mm Flat washer
8	10mm x 60mm Hex Bolt	6	12mm Lock Washer
16	10mm Flat Washers	6	12mm Nut
16	10mm Lock Washers		

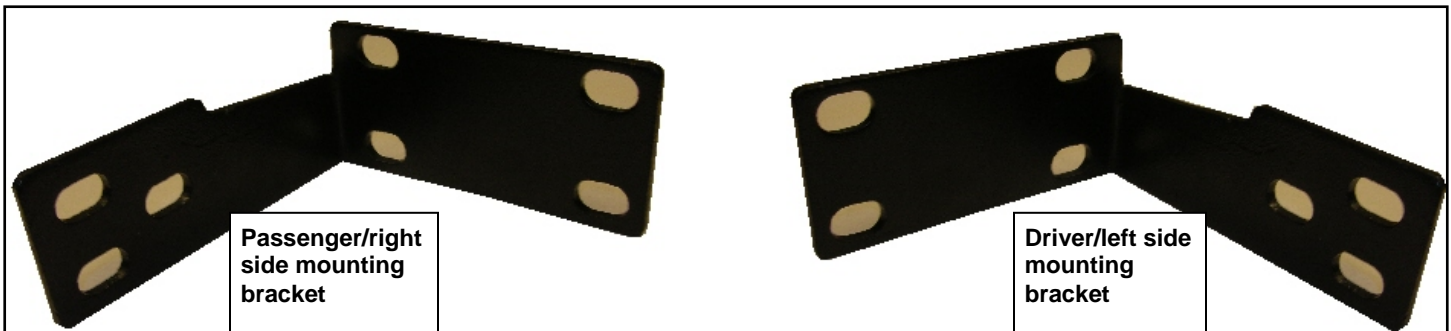

## PROCEDURE:

- 1. REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.**
- Starting with the Passenger/Right side Proceed with your install by removing the factory tow hook of the vehicle, slide the mounting bracket behind the tow hook and secure tow hook and mount bracket with the supplied (4) 10mm x 60mm hex bolt, (8) 10mm flat washers (4) 10mm lock washers (4) 10mm nut (**Fig 1**) shows mount bracket & tow hook attached. Snug but do not tighten hardware at this time. Repeat this step for the driver/Left side installation.
- With help begin to install Grille Guard, move the Passenger/Right side and Driver/Left side Mounting Brackets in as far as possible, and (loosen hardware slightly if necessary). Position the Grille Guard up to the Outer side of the Passenger/Right side Mounting Bracket and line up the mounting holes in the Mounting Bracket with the holes in the Grille Guard, bolt together with the included (3) 12mm x 30mm Hex bolts (6) 12mm flat Washer, (3) 12mm lock washers and (3) 12mm Hex Nut, Repeat this step for the Driver/left side. (**Fig 2**) shows grill guard attached to mount brackets, Snug but do not tighten hardware at this time.
- Adjust the Grille Guard as required for alignment. Tighten all mounting brackets & tow hook hardware, your install is now completed.
- Do periodic inspections to the installation to make sure all hardware is secure and tight.

**To protect your investment**, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish. Do not use any type of polish or wax that may contain abrasives that could damage the finish.

**For stainless steel:** Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap may be used also to clean the Product.

**For gloss black finishes:** Mild soap may be used to clean the Product.

Fig 1

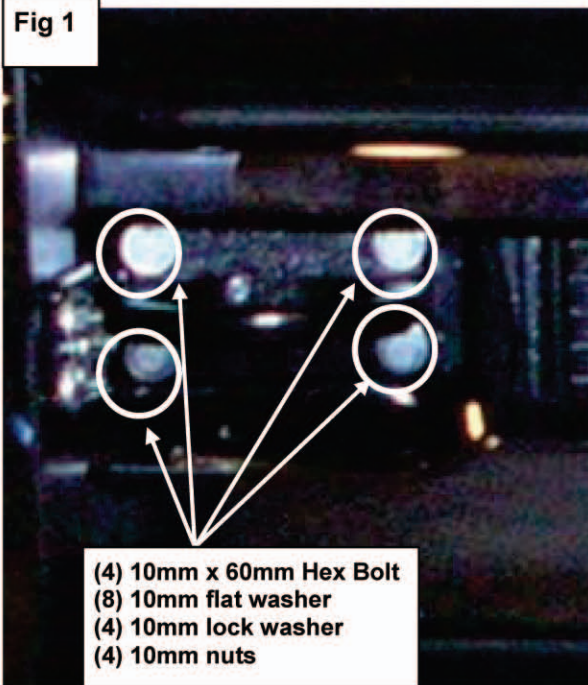


Fig 2

