


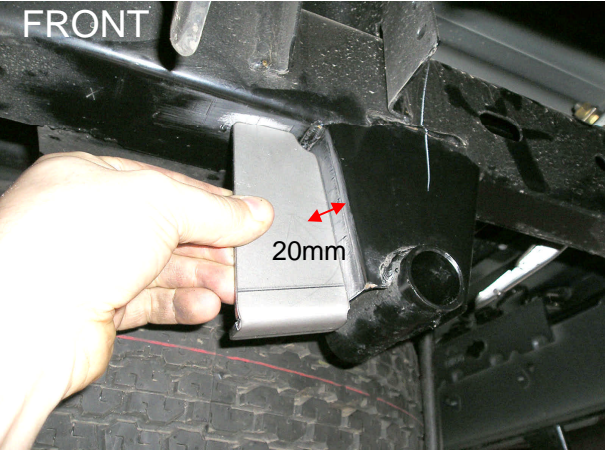

FK30

MITSUBISHI TRITON REAR LEAF SPRING ANTI INVERSION KIT

	<p><u>Installation Procedure</u></p> <p>Remove shackle assembly and bushes.</p> <p>The anti inversion plate is positioned on the front side of the chassis extension as shown.</p> <p>Position the plate 20mm in from the left hand side of the chassis extension.</p>
	<p>Disconnect the battery.</p> <p>Use abrasive paper to remove the paint from the areas to be welded.</p> <p>Weld the anti inversion plate in place using three 20mm welds.</p>
	<p>Paint the anti inversion plate and welds satin black.</p> <p>Reconnect the battery only after all welding is completed.</p> <p>The same installation procedure is used on both sides of the vehicle.</p>