



# **FITTING INSTRUCTIONS**

Part Number: 4420110

Description: ARB UNDER PANEL TO SUIT TOYOTA FJ CRUISER ROCK SLIDERS

## **WARNING**

- ◆ This product must be installed exactly as per these instructions using only the hardware supplied.
- ◆ Do not use this product for any vehicle make or model, other than those specified by ARB.
- ◆ This product or its fixing must not be modified in any way.
- ◆ The installation of this product may require the use of specialized tools and/or techniques
- ◆ It is recommended that this product is only installed by trained personnel
- ◆ These instructions are correct as at the publication date. ARB Corporation Ltd. cannot be held responsible for the impact of any changes subsequently made by the vehicle manufacturer
- ◆ During installation, it is the duty of the installer to check correct operation/clearances of all components
- ◆ Work safely at all times
- ◆ Unless otherwise instructed, tighten fasteners to specified torque

---

**[www.arb.com.au](http://www.arb.com.au)**

Corporate Head Office

42-44 Garden St  
Kilsyth, Victoria  
AUSTRALIA 3137

Tel: +61 (3) 9761 6622  
Fax: +61 (3) 9761 6807

## FITTING REQUIREMENTS

### REQUIRED TOOLS FOR FITMENT OF PRODUCT:

5mm hex key	
-------------	--

### HAVE AVAILABLE THESE SAFETY ITEMS WHEN FITTING PRODUCT:


Protective eyewear	
Hearing protection	




**NOTE:** 'WARNING' notes in the fitting procedure relate to OHS situations, where to avoid a potentially hazardous situation it is suggested that protective safety gear be worn or a safe work procedure be employed. If these notes and warnings are not heeded, injury may result.

WHERE USED	PART No	QTY	DESCRIPTION
<b>SKID PLATE TO ROCKER RAILS</b>	3193763	2	FJ Cruiser Rocker rail skid plates
	6151301	24	Cage nut M8 x 1.25
	6151307	24	Screw M8 x 20mm button head socket
	4581045	24	Washer flat M8 black
	4581047	24	Washer Spring M8 black

## FITTING PROCEDURE

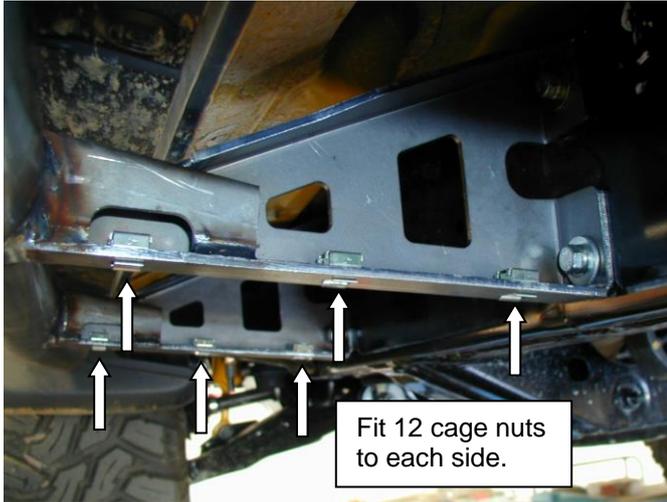

1. Fit the 24 cage nuts into the square holes in the chassis brackets of the rocker rails.



2. Fit the skid plates to the rocker rails using the M8 x 20mm button head socket screws, M8 flat black washers and M8 black spring washers.



3. Repeat for the other side and tighten all screws.